



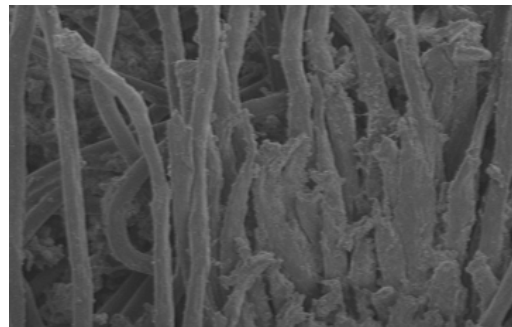

HPB60 POLISHING MATERIAL

- DESCRIPTION:** White Urethane Impregnated Fiber Based Pad for Final Polish and Lapping
- FOR USE ON:** Hand Held Machines
- DUROMETER:** B Scale 60
- COMPESSION:** < 5%
- THICKNESS:** .090", .125", .150", .180", & .250"
- DIAMETER:** Up To 53" Sheets And Pads
- AVAILABLE IN:** Perforated Up To .150"Tk & Plain, Embossed Quotations Available Upon Request
- BACKINGS:** Easy Apply/ Remove PSA is Standard. High Temperature PSA and Magnetic Backing are Available Upon Request
- IMPREGNATIONS:** Abrasive Impregnated Pad Quotations are Available Upon Request
- CAN REPLACE:** SUBA IV, GS
- PERFORMANCE:** HPB60 is our most popular soft pad. HPB60 has many of the characteristics of HPB35, but lasts longer due to its additional hardness. HPB60 has been proven to polish quicker than the competition as-well-as produce lower RA values. The environmentally friendly chemical treatment in HPB60 allows for maximum delivery of abrasive to the sub straight while eliminating the "hot spots" often generated by other pads. HPB60 delivers the abrasive so well, pressure has to be light to avoid pitting from an over aggressive polishing process. Customers converting to HPB60 will notice an immediate decrease in slurry usage and in time, less wear and tear on polishing machinery.

Polishing Comparison

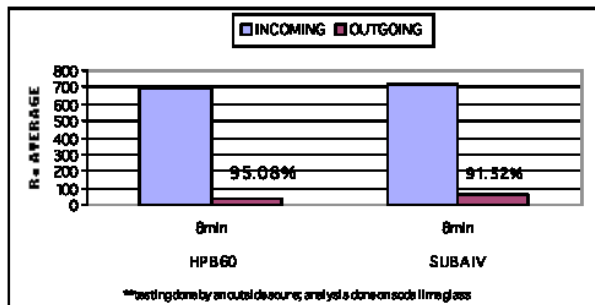

SALEM
Advanced Surfacing Materials

1 800-234-1982